
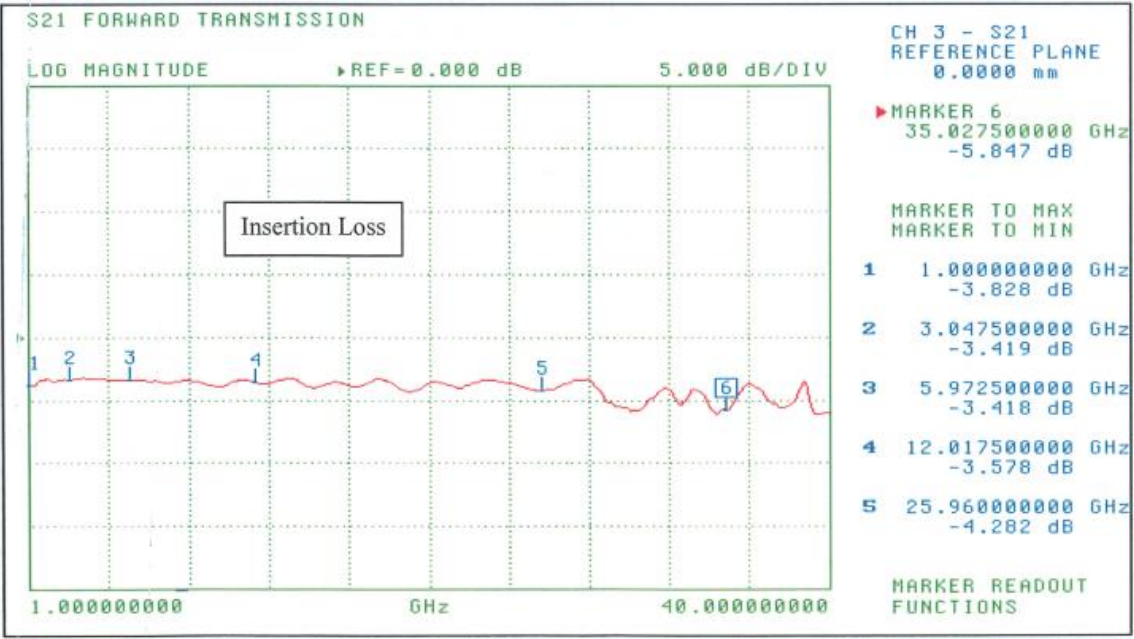


| | |
|--|---|
| <p>Low Cost Drop in 1-36 GHz Power Divider</p> | <p>PmT-PD-136 Model: PmT-PD-136</p> |
| <p>FEATURES</p> <ul style="list-style-type: none"> ■ Low Loss ■ High Isolation ■ Low Amplitude and Phase Errors ■ Broadband Performance |  |
| <p><i>Electrical Specifications (TA=25°C)</i></p> | |
| <p>Parameters</p> | <p>Specifications</p> |
| <p>Frequency</p> | <p>1-36 GHz</p> |
| <p>Insertion loss</p> | <p>< 1 dB</p> |
| <p>VSWR</p> | <p>1.4:1</p> |
| <p>Isolation</p> | <p>> 40 dB</p> |
| <p>Amplitude balance</p> | <p>< 0.3 dB</p> |
| <p>Phase balance</p> | <p>< 5°</p> |
| <p>Power Handling</p> | <p>300 W</p> |
| <p>Operating Temperature</p> | <p>-55-100 °C</p> |
| <p>Storage Temperature</p> | <p>-55-125 °C</p> |
| <p>Connectors</p> | <p>SMA female, GPO, drop in</p> |
| <p>Size</p> | <p>1 x 0.6 x 0.4 inches</p> |
| <p>Finish</p> | <p>Nickel</p> |
|  | |

