

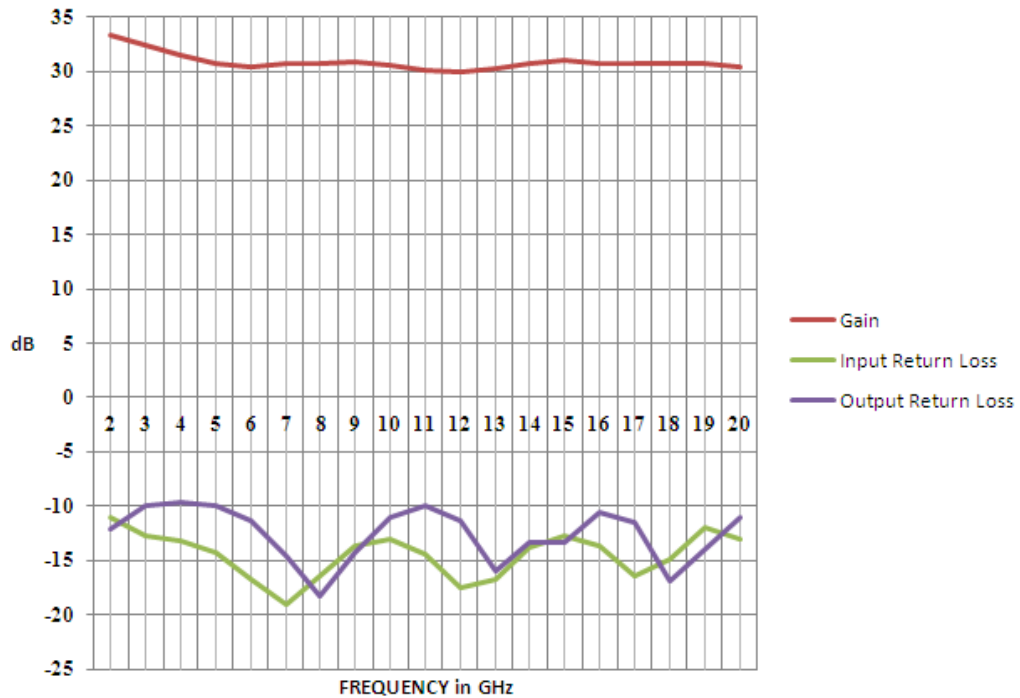



<p>Low Noise Amplifiers 20 to 30 GHz NF 2.2dB Mid Band</p>	<p>PmT-LNA Series Model: PmTA-2030-30-2.2</p>
<p>FEATURES:</p> <ul style="list-style-type: none"> ■ 20 to 30 GHz Frequency Range ■ 30 dB Small Signal Gain ■ Low Noise Figure ■ 50 Ohm Input and Output Matched ■ Internal Voltage Regulation and Bias Sequencing ■ Unconditionally Stable ■ Sealed Module ■ -50°C to 100°C Standard 	
<p style="text-align: center;">Electrical Specifications (TA=25C)</p>	
<p>Parameters</p>	<p>Specifications</p>
<p>Frequency</p>	<p>20 to 30 GHz</p>
<p>Small Signal Gain</p>	<p>30 minimum</p>
<p>Gain Flatness</p>	<p>±1.25 dB</p>
<p>Noise Figure</p>	<p>2.2 dB at mid band</p>
<p>Input Return Loss</p>	<p>-10 dB</p>
<p>Output Return Loss</p>	<p>-10 dB</p>
<p>Pout</p>	<p>11 dB minimum</p>
<p>Operating DC Voltage</p>	<p>12 Volts</p>
<p>Operating DC Current</p>	<p>100 mA</p>
<p>Connectors</p>	<p>SMA Female</p>
<p>DC Connector</p>	<p>Solder in Filter</p>
<p style="text-align: center;">Absolute Maximum Rating</p>	
<p>DC Voltage</p>	<p>20 Volts</p>
<p>RF Input Power</p>	<p>5 dBm</p>
<p>Operating Temperature</p>	<p>-40 °C to 85 °C</p>
<p>Storage Temperature</p>	<p>-55 °C to 150 °C</p>




Gain, Input Return Loss and Output Return Loss




Gain vs Temperature and Frequency

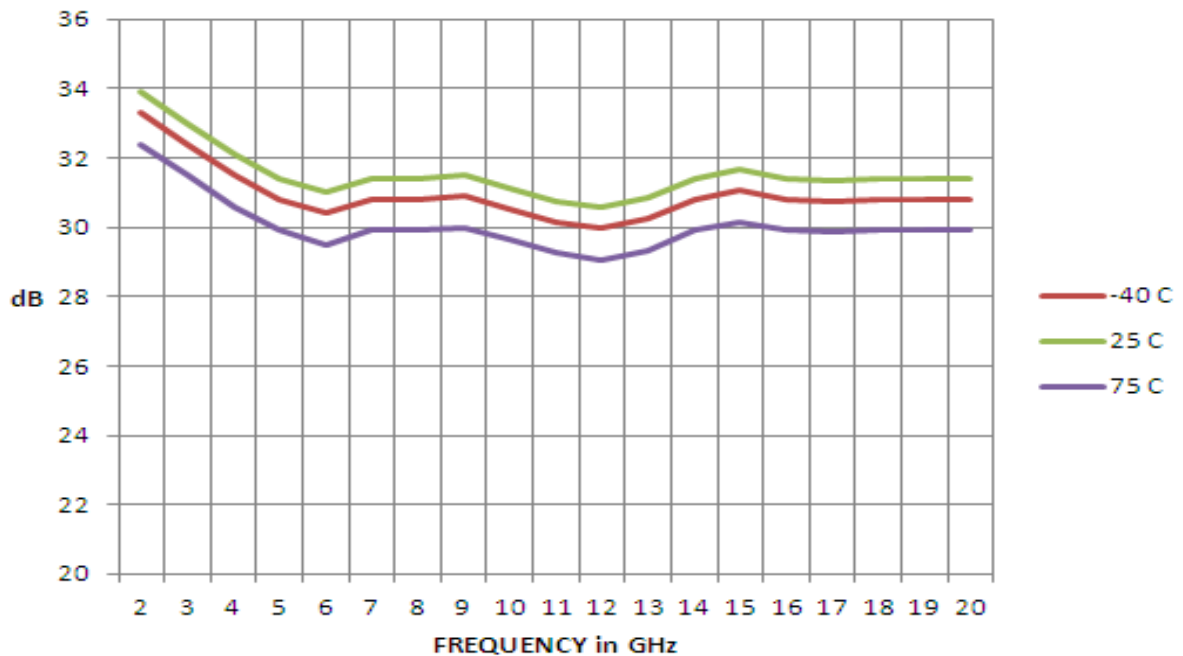




Noise Figure vs. Frequency

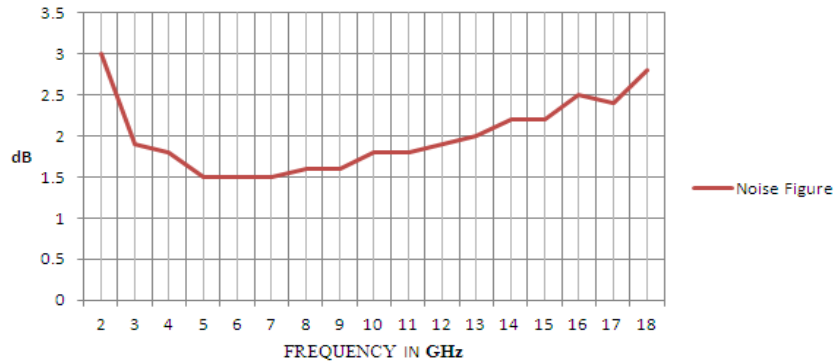

Power -1 dB vs Frequency

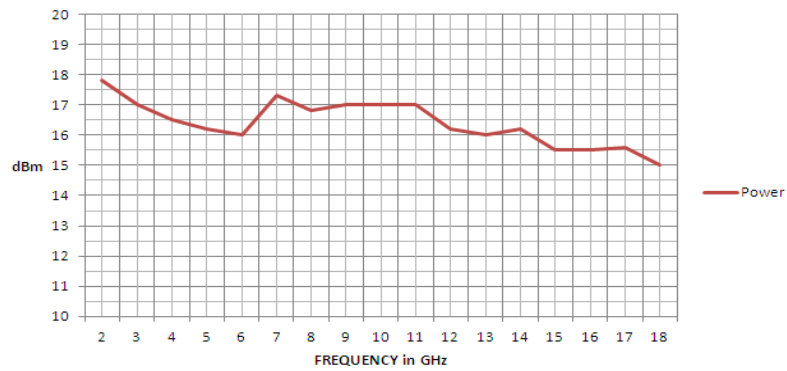

Package:

